



# PA-655/PA-622 AC/DC Current Probe

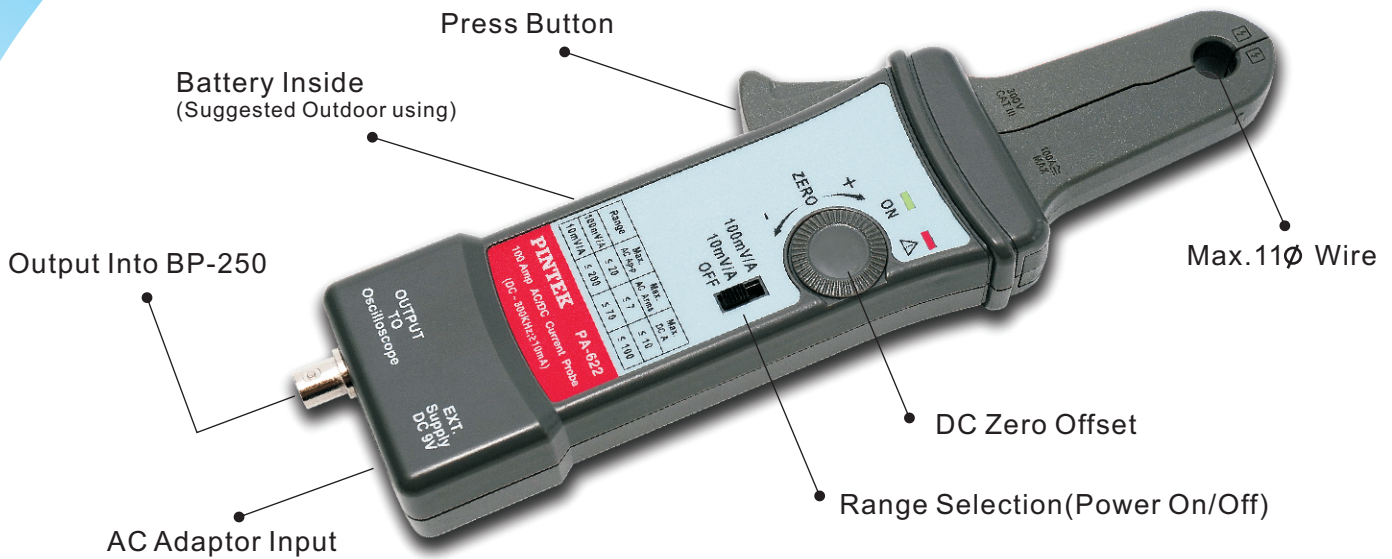

## SPECIFICATIONS:

FUNCTION/MODEL	PA-622	PA-655
<b>DC Accuracy Typical</b>	±3%: 50mA~10A peak at 100mV/A ±4%: 500mA~40A peak at 10mV/A ±15%: 40A~100A peak	±3%: 30mA~5A peak at 200mV/A ±4%: 300mA~20A peak at 20mV/A ±15%: 20A~50A peak
<b>Max. Working Voltage</b>	300V CAT III	300V CAT III
<b>Max. Sensitivity</b>	≥ 10 mA	≥ 5 mA
<b>Frequency Range</b>	DC-300KHz(-3dB)	DC-500KHz(-3dB)
<b>Rise Time</b>	1.2 μS	0.7 μS
<b>Battery or Adaptor</b>	9V NEDA 1604A, IEC DLR61 or PINTEK Specified Adaptor	
<b>Accessories</b>	BP-250, MT-246N, Adaptor, Instruction Manual.	

## ACCESSORIES:

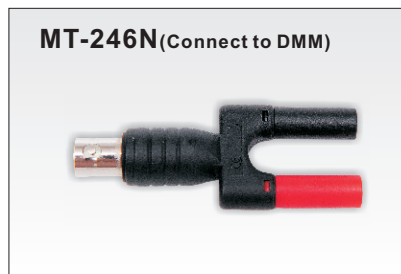

# PINTEK

## Pintek Electronics Co., Ltd

2F No.32 Tai-Pen Rd., Shulin Dist., New Taipei City, Taiwan

Tel: 886-2-86859562~3 ; 886-2-86861898

Fax: 886-2-86852081 ; 886-2-86861114

http://www.pintek.com.tw

E-Mail : pintek@pintek.com.tw ; pintek@ms26.hinet.net

CE

SALES AGENT